


6316 / 6332

Relay Expansion Board

The Relay Expansion board extends the control capabilities of the 6000/6100 Series controllers for installations that call for extensive control of parameters (building automation, elevator control, etc.).

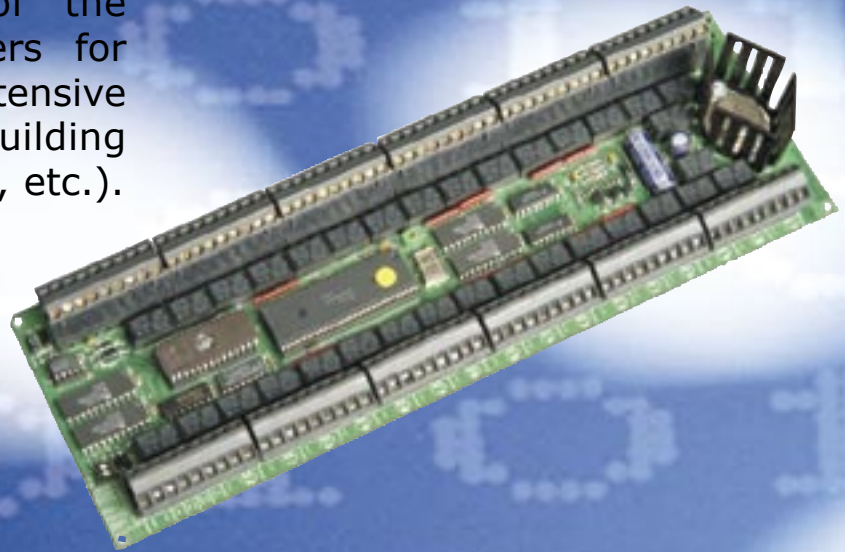

- 16 or 32 relays
- Remote connection to databus
- Up to 4 boards per controller (128 relays total)
- Individual programming of each relay according to controller instructions
- Optional power supply with battery backup

ACCESS TO PEACE OF MIND™

SECURITY • PARKING • ACCESS CONTROL

Specifications:

Power Supply	+12 VDC (11.00 VDC to 14.00 VDC)
Supply Current	800 mA @ 12 VDC
Operating Environment	-40 ⁰ to 158 ⁰ F (-40 ⁰ to 70 ⁰ C)
Case Dimensions	14.5"W x 18.5"H x 4.25"D (3.75cm x 47cm x 11cm)
Case Materials	14 gauge steel, powder coat paint with key lock
Cable Requirements	stranded RS-485 network cable - 1 pair shielded 12-15pF Power - 1 pair 18 gauge
Relays	16 or 32 Form C relay 2 Amp 30VDC (SPDT)
Connections	45 ⁰ angled removable plug-in screw terminal blocks; High quality sliding cage for easy wire insertion; Allows for 12 - 26AWG wires
Part Numbers	6316 - 16 Relay expansion board 6332 - 32 Relay expansion board

